



Characteristics

Type	572.14	572.12
Port	G 1/4	G 1/2
Pressure gauge	Not possible	
Type of construction	Centrifugal filter Stainless steel filter element	
	Special versions on request	
	- NPT threads - 5 µm filter element - drain valve	
Input pressure	Max. 50 bar	
Mounting position	Vertical	
Drain	Locking screw	
Mounting type	In-line	
Temperature		
Medium	Max. +80°C	
Ambient	Max. +80°C	
Filter rating	50 µm	
Bowl Contents	0,15 l	0,25 l
Weight [g]	1000	1900

Filter

50 bar

Size 1


Size 2

G 1/4

G 1/2

572.14

572.12



Materials

Part	Material
Head piece	1.4404 (AISI 316L)
Filter element	1.4404 (AISI 316L)
O-rings	FKM
Condensate bowl	1.4404 (AISI 316L)



Main spare parts

Designation	Part No.
Repair kit	
572.14	22.5724.4
572.12	22.5722.4



Typical applications

- Stainless steel filter containing no non-ferrous metals for use in the food processing, chemical, mining, plant construction and special machinery industries
- Suitable for use in medical technology
- All applications where excellent resistance to corrosion is essential

- Important: This is not a sterile filter!

Ordering information


Designation	Order No.
Stainless steel filter In-line port:	
G 1/4	572.14
G 1/2	572.12
Accessories	
Mounting bracket stainless steel 1.4401 for 572.14	567/5
Mounting bracket stainless steel for 572.12	576/6

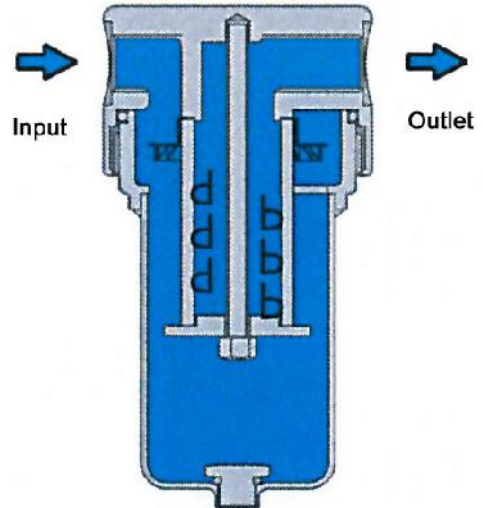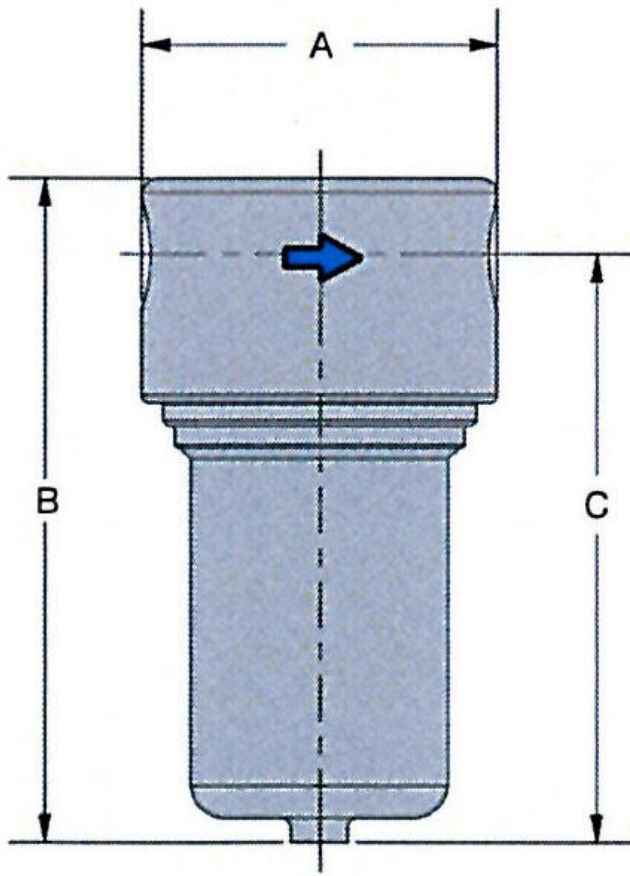

Dimensions [mm]

Type	Pipe thread	A	B	C
572.14	G 1/4	64	139	125
572.12	G 1/2	80	150	130

Flow diagram

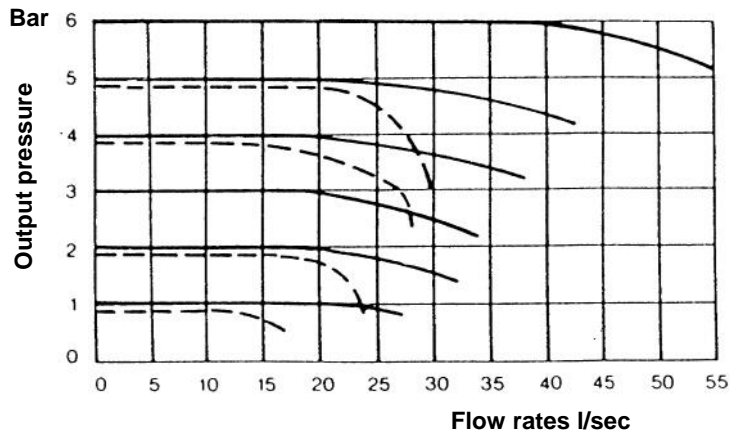

© Riegler 1-23