

»FUTURA« series


Input pressure	0.4 - 16 bar
Temperature range	-10 °C to 50 °C
Medium	Compressed air, neutral gases
Housing	PA66 GF60
Sealant	NBR
Connecting thread	Material: Die-cast zinc
Flow rate measurement	At $P_2 = 6$ bar and pressure drop $\Delta p = 1$ bar

Non-return valve


Art. No.	Type No.	Thread	Size	Flow rate l/min
156656	FU 9405	G 3/4	4	16000
156657	FU 9406	G 1	4	16000

Accessories / spare parts

Art. No.	Type No.	Description
100048	H 854	Mounting bracket, incl. 2 screws
100049	WK 103	Wall bracket, incl. 2 screws
100050	KP 300	Joiner set, incl. 2 screws
135853	WK 104-34	Wall bracket with connection thread G 3/4
135854	WK 104-1	Wall bracket with connection thread G 1

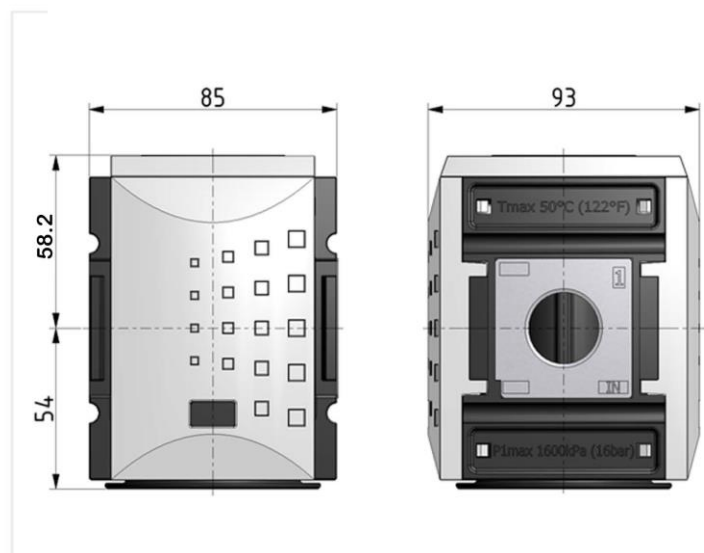

Durchflussdiagramm

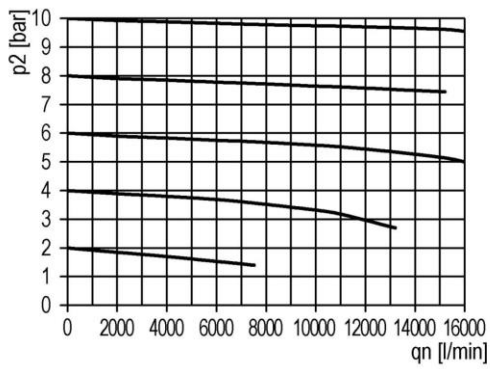

Symbole

