



Vacuum Switch AF30

- Snap action micro switch
- 250V / 6A
- Change over contact SPDT
- Elastomer membrane
- Adjustment range: - 0,85... - 0,15bar
- Preset ex works possible
- Easy adjustment via adjustment knob
- Rugged design
- E-connection DIN EN 175301-803A or M12x1
- Female thread or flange connection

Pressure switch, electrical connection with plug connector, type A acc. to DIN 43650

Art. No.	Type No.	Connection	A mm	B mm
103036	DS 5901	Flange	48.0	28.0
103037	DS 5911	G 1/4	48.0	28.0

Pressure switch, electrical connection M12x1


Art. No.	Type No.	Connection	A mm	B mm
103038	DS 5902	Flange	48.0	28.0
103039	DS 5912	G 1/4	48.0	28.0

Technical data

Construction:	snap action micro swith AF30
Operating fluid:	neutral gases
Mechanical installation:	over fluid connection
Mounting position:	any
Max. system pressure:	20bar
Repeatability:	guide value $\pm 0,05$ bar at room temperature
Hysteresis*:	guide value: 150...250mbar, not adjustable
Life cycles, mech.:	$> 5 \times 10^6$
Max. switching frequency:	~ 1 Hz
Temperature range*:	-40...+100°C as a function of used elastomere
Vibration resistance:	10g (10 ... 2000Hz) sinus acc. to ISO 16750-3
Shock resistance:	30g, 14ms shaped sinus acc. to DIN 40046, T7
Swichting element:	snap action micro swith with self cleaning pins
CE-mark:	acc. to EU-standards 2014/35/EU (LVD); 2011/65/EU (RoHS)
Protection class EN 60529:	IP65 using DIN EN 175301-803A, IP67 using M12x1
Weight:	$\sim 0,3$ kg



* please contact the technical support for alternative or special requirements regarding hysteresis and temperature
 Subject to technical alternations!

Electrical connection data – dimensions

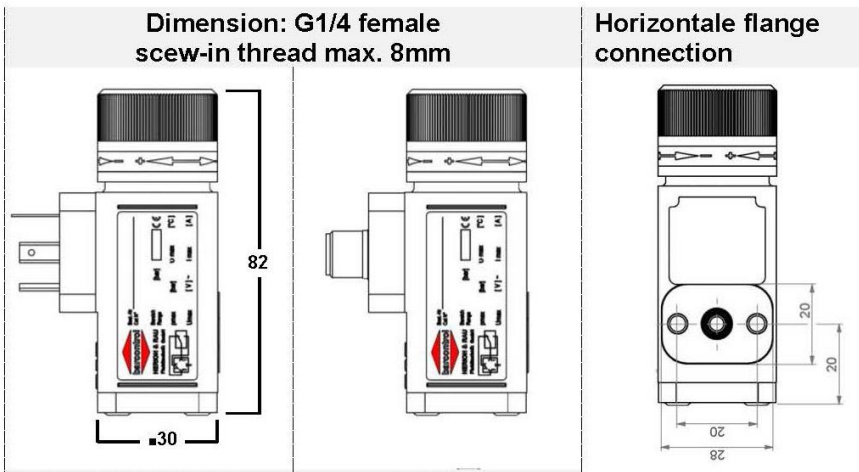

DIN EN 175301-803A

M12x1



	250VAC	24VDC	48VAC	24VDC
Ohmic load	6A	3A	4A	3A
Inductive load	1A	1A	1A	1A