


Opening / closing without stem stroke.

Max. operating pressure:	16 bar
Body, head piece and gate valve wedge:	Brass
Stem and stuffing box nut:	Brass
Adjusting knob:	Aluminium
Applications:	Non-corrosive liquids, gases and steam up to 120 °C

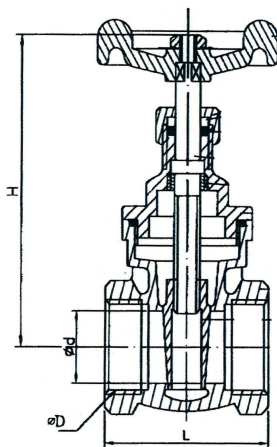

250.35

Female thread gate valves, brass body

Art. No.	Port G	DN	H	L	Ød	ØD
250.33	3/8	10	73.0	41.0	13.5	3/8
250.34	1/2	15	74.0	42.5	13.5	1/2
250.35	3/4	20	84.5	49.0	19.2	3/4
250.36	1	25	96.5	54.5	24.5	1
250.37	1 1/4	32	111.5	58.0	31.5	1 1/4
250.38	1 1/2	40	127.0	61.0	36.5	1 1/2
250.39	2	50	146.0	69.0	47.5	2
250.40	2 1/2	60	189.0	88.0	61.0	2 1/2
250.41	3	70	221.0	97.0	73.0	3