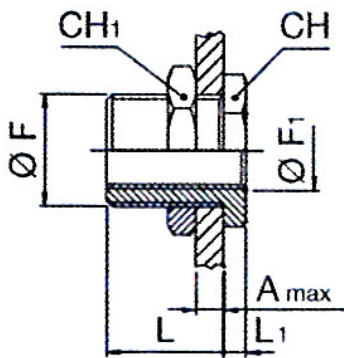


## Standard screw fittings

Nickel-plated brass, »value line« Series

 Max. operating pressure            60 bar  
 Max. operating temperature       150 °C


232.04-N-E

### Bulkhead connector

Art. No.	Type No.	F	F1	A <sub>max</sub>	L	L1	CH	CH1
115518	232.01-N-E	M 16x1.5	G 1/8	10.0	14.0	4.0	19	22
115519	232.02-N-E	M 20x1.5	G 1/4	16.0	21.0	4.0	24	27
115520	232.03-N-E	M 26x1.5	G 3/8	15.0	21.0	5.0	30	32
115521	232.04-N-E	M 28x1.5	G 1/2	21.0	27.0	6.0	32	36